

Wave hot&cold. Built-in water dispenser




Technical details

- Wave delivers four types of microfiltered water: room temperature, chilled, chilled carbonated, and hot at 85°C.
- Wave is available built-in, 45 cm high.
- Wave controls are soft-touch technology, totally without buttons.
- Wave comes with a disposable CO2 cylinder (standard) and can also be used with rechargeable cylinder. (An average of 120 litres of carbonated water is produced with a 600 gr. cylinder)
- Inside Wave there is a disposable CO2 cylinder which must be periodically changed. The carbon dioxide consumption depends on the degree of sparkle used for the water.

Built-in Wave Hot&Cold

W min. 597 mm
D min. 547 mm
H min. 450 mm

Any kind of water,
anytime,
at your place.

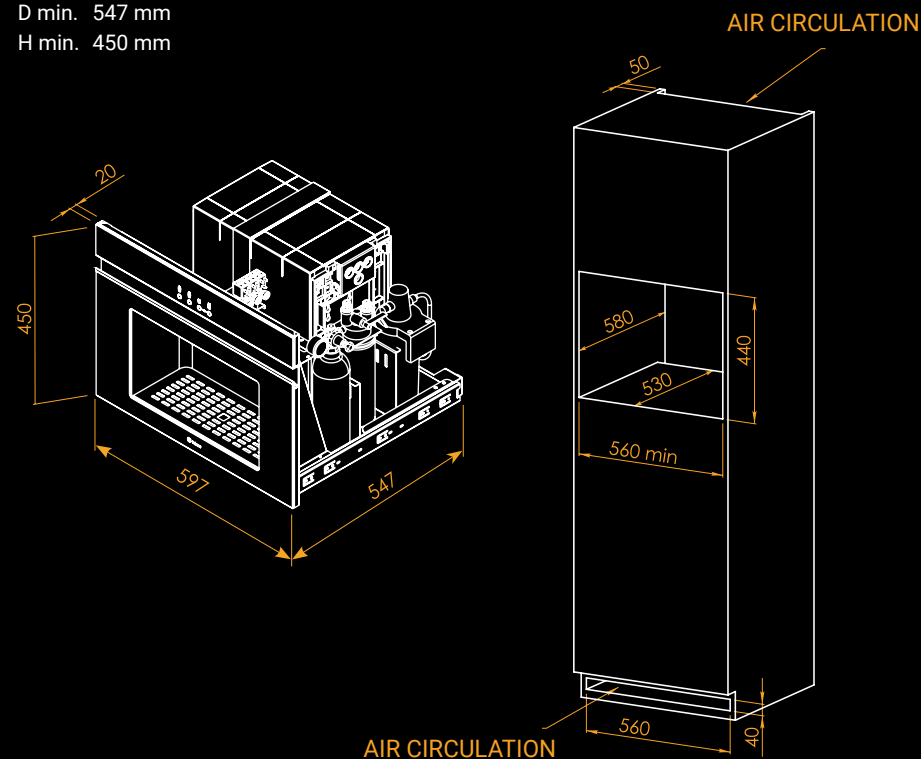

Finishes

All Wave models can be customized with the following finishes: stainless steel, black glass, De Castelli finishes.

Technical specifications

Technical specifications	Wave 45 Hot&Cold
Compressor Power	1/11Hp
Voltage	230 V – 50/60 Hz
Chilled and sparkling water production	15 l/h
Adjustable carbonation system	min.- max 2 ÷ 3,5 bar
Adjustable cold water temperature	da 5 a 12°C
Adjustable cold water temperature	85°C +/- 1°C
Water inlet pressure	2 ÷ 3,5 bar
Max. absorbed power	810 W
Capacity of disposable CO2	600 g
Filter duration	Lt 2.700 / 1 anno
Net weight of built-in machine	35 kg
Refrigerant gas	R600

Standard accessories: 1 NSF Class 1-certified filter / 8 mm food hose for water connection with 3/4" F. fitting / Anti-flooding device / Water shutoff valve / "claris" hot water filter that preserves against scale formation and ensures durability. The use of the filter is highly recommended when the water (inlet) has a hardness $\geq 17^\circ\text{F}$. The appliance offers a filter "pre-alarm" after 5 months and an alarm after 6 months to check its status, not interrupting the supply. Replacement is recommended between 6 months and 1 year, depending on the water hardness level.

Option: 4kg external CO2 cylinder / Disposable CO2 cylinder.

Installation requirements

The appliance comes with a power cord (1.5 m long) and Schuko plug. A power supply and potable water inlet are required for fitting. A polyethylene food-grade tube is provided, with 3/4" F connector.

For the built-in version on tall units, fit the pull-out runners on the internal side panels of the cabinet. It is essential to leave at least 50 mm clearance at the back of the cabinet from the top to the bottom of the tall unit.

Fit the appliance away from heat sources, ovens or other appliances that produce heat or require the circulation of large amounts of air. Pull the appliance out of its position for periodical maintenance by a specialist technician.

Check the filter and CO2 cylinder regularly. The duration of the filter incorporated in the appliance is 2700 litres or 1 year. The filter must always be in good condition. The appliance offers an 11-month filter pre-alarm and 12-month alarm without interrupting the delivery. The replacement of the filter and sanitization of the plant must be done by qualified persons after 12 months of use to ensure the wholesomeness of the plant and the quality of the water supplied.

Wave houses a disposal CO2 cylinder which must be replaced as and when necessary. The amount of carbon dioxide used depends on the level of sparkle chosen for the water.

On request the system can be prepared for the use of a 4 kg rechargeable external CO2 cylinder with a 3.5 m connecting pipe.